


# Interactive Flat Panel Display

## E series

TA-65/TA-75/TA-86



UHD  
Resolution



4GB RAM  
32GB ROM



20 touch  
points



Android 13



Zero bonding



Share screen



USB Type-C



8 arrays



Split screen



Remote control

## Display

Size	65inch	75inch	86inch
Type	DLED		
Aspect ratio	16:9		
Screen display size (mm)	1428*803	1646*925.5	1895.04*1065.96
Physical resolution	3840 × 2160 (4k)		
Display color	10bit/1.07 Billion		
Refresh rate	60Hz		
Brightness	≥400cd/m <sup>2</sup>		
Contrast	4000:1		
Response time	6ms		
Viewing angle	178°/ 178°		
Display protection	4mm full tempered high explosion-proof glass		
Backlight life	50000 hours		

## System

CPU	Quad-core ARM Cortex-A55
System version	Android 13.0
RAM	4GB
ROM	32GB
Operating system	Support windows, Android, Mac OS, Linux
Operating temperature	0°C-40°C

## Touch

Technology	IR
Touch points	20 points under Android, 45 points under Windows
Positioning Accuracy	1mm
Drive Mode	Drive Mode
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter
Palm erase	Yes
Communication Port	USB 2.0
Reaction time (Single touch)	< 6ms
Touch resolution	32768 x 32768
Times of touches	Unlimited time in theoretical
Transfer speed	12Mb/s

## Connectivity

### Back port

HDMI IN	x2
USB-A 2.0	x1
USB-A 3.0	x1
USB Touch	x1
TF Card	x1
COAX	x1

## Interactive Flat Panel Display

RS232	x1
AV IN	x1
AV OUT	x1
Earphone	x1
Mic in	x1
RJ45 IN	x1
RJ45 OUT	x1
WIFI	Support IEEE 802.11 a/b/g/n/ac

### Front port

HDMI IN	x1
USB Touch	x1
USB-A 3.0	x3
Type-C	x1
Recovery system	x1 (For technicians)

## Dimension

Overall dimensions (mm, LxWxT)	1486*901.3*89.1	1708*1026.5*89.1	1954*1165*89.1
Net weight	37.7kg	51.5kg	67.2kg
Gross weight	46.5kg	64.6kg	85.2kg
Packaging size (mm, LxWxT)	1600*205*1001.5	1846*215*1180	2092*215*1319
VESA	500x400	600x400	800x400

## Power Supply

Consumption rate	≤190W	≤230W	≤320W
Standby power	≤1W		
Voltage range	AC100-240V~50/60Hz		
Speaker specification	2 x 15 watts		

## Accessories



Power cable	x1
Remote control	x1
Wall mount	x1
HDMI & Touch USB cable	x1
Whiteboard pen	x2

## Built-camera and mic parameter (optional)



Microphones	8 integrated microphones
Pickup distance	10m
Sample rate	Sampling frequency 48K Hz; sampling number 24bit
Features	Full duplex, echo cancellation, noise suppression
Camera resolution	Support 1080P
Camera	12/48 Megapixels, top x 1
Camera lens angle	Not less than 90 degrees
Angle	105°/118°/120°

Copyright © 2008-2023 TACTEASY TECHNOLOGY CO., LTD All Rights Reserved.



65''

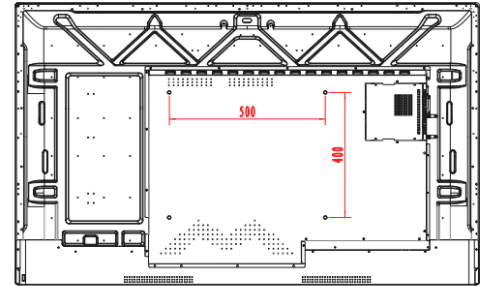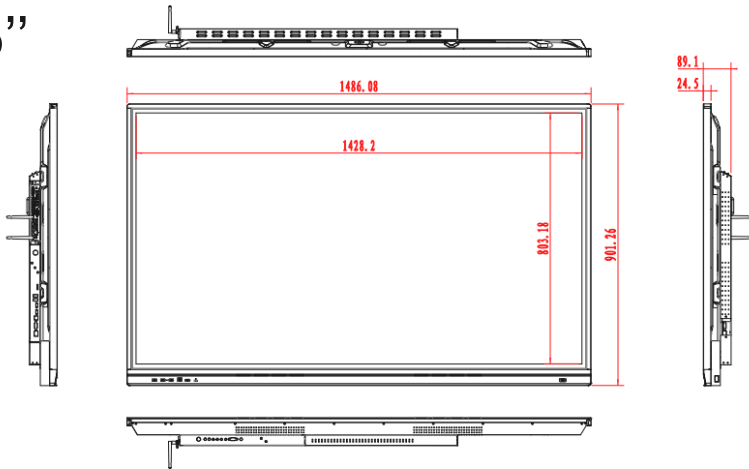

75''

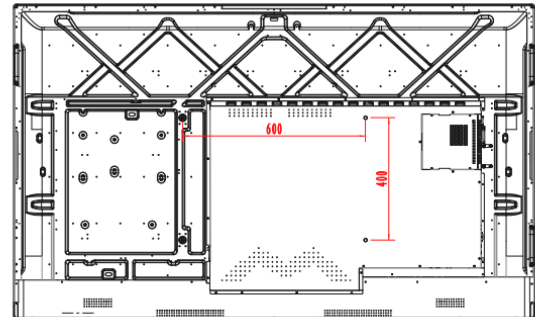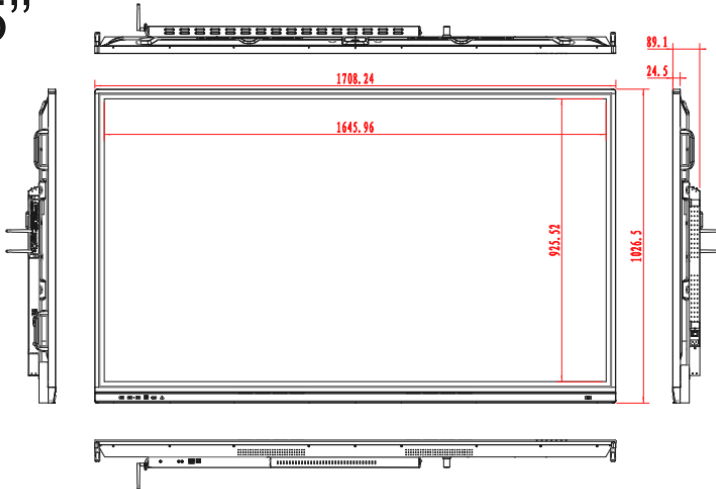

86''

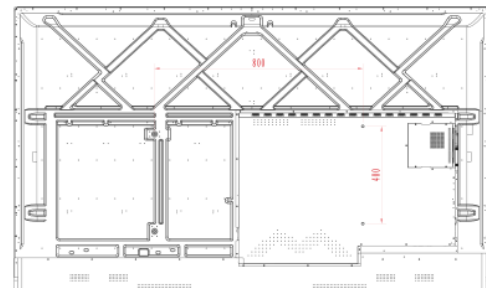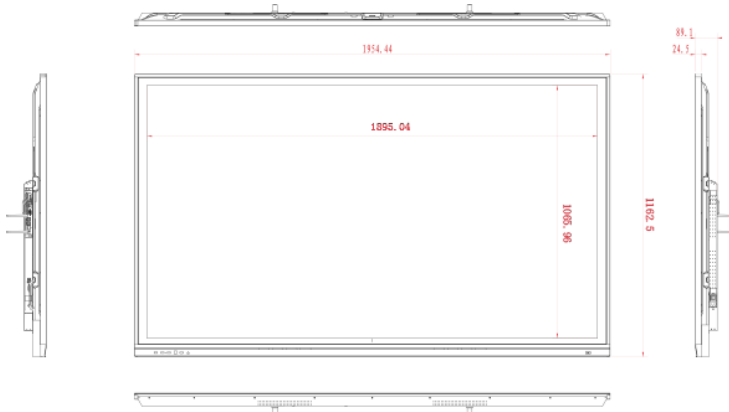

Details are subject to change without notice