

ViewSonic® PROJECTOR PX703HD


Key Features

- 1.3X optical zoom
- SuperColor™ technology
- Energy-efficient SmartEco+ Mode
- Vertical Lens Shift
- vColorTuner



Product Description

The ViewSonic PX703HD is a practical Home Cinema Projector, featuring 3500 ANSI lumens, 1080p Full HD resolution, and ViewSonic's exclusive SuperColor™ technology, which together produce the finest of details and stunning colour in any medium sized space. The projector comes with an energy-saving SuperEco+ mode that reduces power consumption and extends lamp life to up to 20,000 hours, reducing the frequency of lamp replacement and lowering maintenance costs. Digital lens shift and 1.3x optical zoom make flexible installation a breeze. Users can also utilise the vColorTuner software and cloud-based colour profile exchange to create customised colour profiles, share them, or download other profiles to fine-tune them as their own. Dual HDMI inputs and USB power supply further increase the flexibility of the user's entertainment experience.

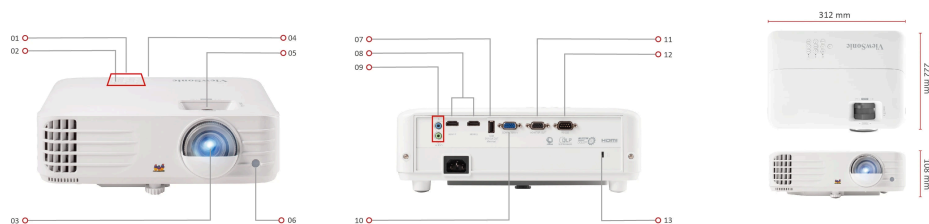

1. Keypad
2. LED Indicator
3. Lens
4. Power Key
5. Zoom/Focus
6. Front IR
7. USB Type A

8. HDMI Port
9. Audio In/Out
10. Computer In
11. Computer Out
12. RS-232
13. Kensington Lock

Visit Us

www.viewsonic.com

SPECIFICATION

Native Resolution:	1920x1080
Brightness:	3500 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	12000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Lamp
Light Source Life (hours) with Normal Mode:	5000
Light Source Life (hours) with SuperEco Mode:	20000
Lamp Watt:	203W
Lens:	F=1.9-2.47, f=12-15.6mm
Projection Offset:	110%+/-6%
Throw Ratio:	1.13-1.47
Optical Zoom:	1.3x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	0.75m-9.76m (100"@2.5m)
Keystone:	+/- 40° (V)
Lens Shift V. Range:	+/- 5% (Digital)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to WUXGA_RB(1920 x 1200) *RB-Reduced Blanking
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz

INPUT

Computer in (share with component):	1
HDMI:	2 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

OUTPUT

Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	10W
USB Type A (Power):	1 (5V/1.5A)

CONTROL

RS232 (DB 9-pin male):	1
USB Type A (Services):	1 (share with USB A Output)

OTHERS

Power Supply Voltage:	100-240V+/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 300W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.62kg
Gross Weight:	3.78kg
Dimensions (WxDxH) with Adjustment Foot:	312x222x108mm
Packing Dimensions:	415x168x297mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, Total 20 languages

STANDARD ACCESSORY

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	Yes
Warranty Card:	Yes (CN Only)

OPTIONAL ACCESSORY

Lamp/Light Source:	RLC-123
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.