


# TA-65


## 65" Interactive Flat Panel Display with Camera and Microphone



Camera & Microphone

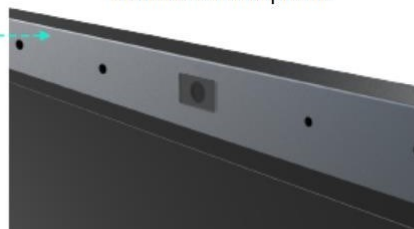

Power and Indicator

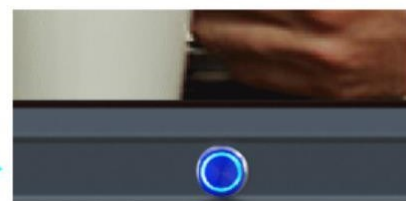

- Multitouch
- 4K Resolution
- Dual system
- Google Play
- Narrow frame
- EClass Software
- Ultra Durable
- Anti-glare
- LinkGo Software
- ECO

## 1. Screen characteristic

Appearance	Ultra-narrow aluminum alloy frame design, anti-glare tempered glass
Overall dimensions	1485.1(L)*914.3(W)*91.6(T) mm
Consumption rate	≤180W (not including Ops)
Standby power	≤1W
Voltage range	AC100-240V~50/60Hz
Net weight	49.8kg
Gross weight	63.8kg
Packaging size	L1653*W1037*T235mm
VESA	500 x400 mm

## 2. System parameters

CPU	Dual-core A73 and dual-core A53 1.5GHZ
System version	Android 8.0 Embedded Systems
RAM	3G
ROM	32G
External storage	SD card maximum expansion to 128G
Back Input interface	2*HDMI
	1*VGA
	1*Audio
	2*USB2.0
	1*AV
	1*RJ45/LAN
	1*RS232
	1*Mic
	1*TF(SD card)
Back Output interface	1*SPDIF
	1*Earphone

	1*USB2.0 touch
Front input interface	3*USB

### 3. Display parameters

Display size	65 Inch (16:9)
Display type	DLED
Screen display size	1428.5 ( H ) * 803.5 ( V ) mm
Physical resolution	3840×2160
Display color	8 bit/16.7 Million
Refresh rate	60HZ
Brightness	≥350 cd/m <sup>2</sup>
Contrast	4000:1
Response time	6ms
Viewing angle	178°
Display protection	4mm full tempered high explosion-proof glass
Backlight life	50000 hours

### 4. Audio parameters

Speaker specifications	15W / 8Ω× 2 bass effect speaker
Audio characteristics	Balance, automatic volume control, surround sound, equalizer
Camera	Built-in 8 Mega pixel
Microphone	6 Array / 8-10 meters pick-up
WIFI	support IEEE 802.11 a/b/g/n/ac , 2.4Ghz /5Ghz
Support wireless image receiver on Window /Mac / IOS / Android OS wireless connecting operating in two-way communication	

## 5.Touch parameters

Touch sensing technology	Infrared sensing positioning recognition touch technology, HID free drive
Writing method	Fingers, touch pens or other non-transparent objects not less than 5mm in diameter, support 20 points finger touch
Positioning accuracy	More than 90% of the touch area is $\leq 1\text{mm}$
Reaction time	$< 6\text{ms}$
Communication Interface	Type A USB Male, Support USB 2.0 (FULL SPEED) HID Compliant (Plug & Play) Touch PC Interface
Touch resolution	32768*32768
Times of touches	Unlimited time in theoretical
transfer speed	12Mb/s
Driver	Automatic system identification, free drive
Operating system	Support windows, Android, Mac OS, Linux
Operating temperature	$-10^{\circ}\text{C}-60^{\circ}\text{C}$

## 6.Accessories

Power cable	1pcs
Remote control	1pcs
Wall mount	1pcs
HDMI & Touch USB wire	1pcs
Whiteboard pen	2pcs