

**ViewSonic**  PROJECTOR  
**PA503S**

## Key Features


Higher Brightness. Longer Lamp Life.

- Auto Power Off
- 22,000:1 contrast ratio
- SuperColor™ Technology
- 5 colour modes
- Vertical Keystone



## Product Description

The ViewSonic PA503S offers impressive visual performance in small business meeting rooms and classrooms. With higher brightness and longer lamp life, PA503S projector is guaranteed to reproduce the finest of details in any environment for much longer. ViewSonic exclusive SuperColour™ technology offers a wider range of displayable colour ensuring true-to-life colour accuracy in both bright and dark environments without sacrificing image quality.

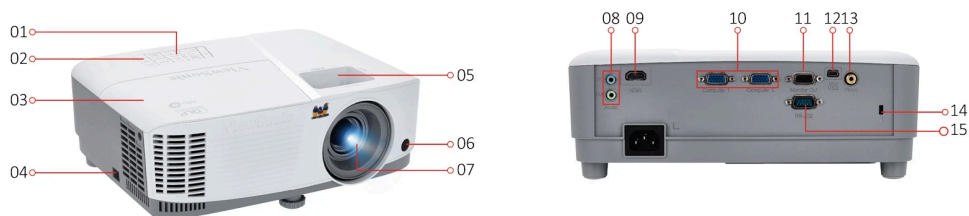

- |                    |                           |           |
|--------------------|---------------------------|-----------|
| 1. Keypad          | 8. Audio in/out           | 15. RS232 |
| 2. LED indicator   | 9. HDMI                   |           |
| 3. Lamp cover      | 10. Dual VGA              |           |
| 4. Security lock   | 11. VGA out               |           |
| 5. Zoom/Focus      | 12. Mini USB              |           |
| 6. Front IR        | 13. Video                 |           |
| 7. Projection Lens | 14. Kensington® Lock Slot |           |

**Visit Us** [www.viewsonic.com](http://www.viewsonic.com)

**SPECIFICATION**

Native Resolution:	800x600
Brightness:	3800 (ANSI Lumens)
Contrast Ratio with SuperEco Mode:	22000:1
Display Color:	1.07 Billion Colors
Light Source Type:	Lamp
Light Source Life (hours) with Normal Mode:	5000
Light Source Life (hours) with SuperEco Mode:	15000
Lamp Watt:	190W
Lens:	F=2.56-2.68, f=22-24.1mm
Projection Offset:	120% +/-5%
Throw Ratio:	1.96-2.15
Optical Zoom:	1.1x
Digital Zoom:	0.8x-2.0x
Image Size:	30"-300"
Throw Distance:	1.19m-13.11m(100"@3.98m)
Keystone:	+/- 40° (V)
Audible Noise (Normal):	31dB
Audible Noise (Eco):	27dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Video Compatibility:	NTSC, PAL, SECAM
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz
<b>INPUT</b>	
Computer in (share with component):	2
Composite:	1
HDMI:	1 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1
<b>OUTPUT</b>	
Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	2W
<b>CONTROL</b>	
RS232 (DB 9-pin male):	1
USB Type Mini B (Services):	1

**OTHERS**

Power Supply Voltage:	100-240V +/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 260W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.2kg
Gross Weight:	3.24Kg
Dimensions (WxDxH) with Adjustment Foot:	294x218x110mm
Packing Dimensions:	365x300x188mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Total 23 languages
User Guide Language:	English, S-Chinese, T-Chinese, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Total 15 languages

**STANDARD ACCESSORY**

Power Cord:	1
VGA Cable:	1
Remote Control:	1
QSG:	Yes
Air Filter:	Yes (CN Only)
Warranty Card:	Yes (CN Only)

**OPTIONAL ACCESSORY**

Lamp/Light Source:	RLC-108
Air Filter:	RSPL
Wall/Ceiling Mount:	PJ-WMK-007
Carry Bag:	PJ-CASE-008

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.